



SUCTION STRAINERS

Series SS (Steel)




Features

- 100 stainless steel mesh
- 200 mesh brass
- Re-usable
- Epoxy bonded joints for compatibility with all fluids
- Rugged steel inner support
- Plated end caps
- 100 & 200 mesh from stock

Options

- No by-pass or 3 psi by-pass available (RV3)
- Custom sizes and mesh are available upon request

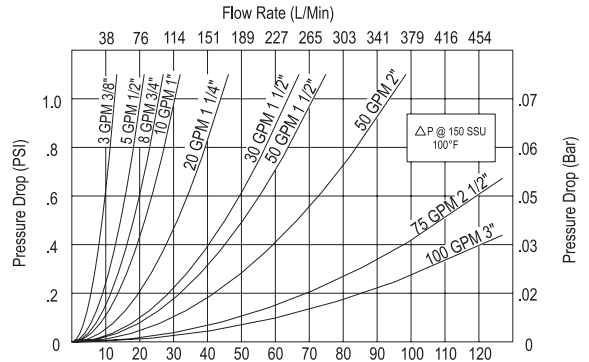

Ordering Information

To Specify By-Pass Option Add -RV3 to Part Number

Vescor Part Number	Nominal Flow		Port (NPT)	Filter Area		Dimensions				Nominal Mesh	Micron
	GPM	L/min.		in.	cm	A in.	mm	B in.	mm		
SS3*	3	11	3/8"	34	220	2.25	57	1.90	48	100	140
SS5	5	19	1/2"	62	400	3.10	78	2.70	67	100	140
SS8	8	31	3/4"	62	400	3.50	89	2.70	67	100	140
SS10	10	38	1"	110	710	5.40	136	2.70	67	100	140
SS20	20	88	1 1/4"	162	1050	6.90	174	3.40	86	100	140
SS30	30	120	1 1/2"	225	1450	8.10	204	3.40	86	100	140
SS50	50	198	1 1/2"	340	2190	10.00	225	4.00	100	100	140
SS51	50	198	2"	340	2190	10.00	225	4.00	100	100	140
SS75	75	283	2 1/2"	400	2580	10.10	257	5.20	130	100	140
SS100	100	379	3"	500	3230	11.63	295	5.20	130	100	140

*By-Pass not available on this model

Ordering Information

To Specify By-Pass Option Add -RV3 to Part Number

Vescor Part Number	Nominal Flow		Port (NPT)	Filter Area		Dimensions				Nominal Mesh	Micron
	GPM	L/min.		in.	cm	A in.	mm	B in.	mm		
SS32M*	3	11	3/8"	20	220	3.50	90	1.81	46	200	90
SS52M	5	19	1/2"	62	400	4.30	109	2.50	64	200	90
SS82M	8	31	3/4"	62	400	4.30	109	2.50	64	200	90
SS102M	10	38	1"	110	710	5.47	139	2.50	64	200	90
SS202M	20	88	1 1/4"	162	1050	5.47	139	3.38	86	200	90
SS302M	30	120	1 1/2"	225	1450	7.87	200	3.38	86	200	90
SS502M	50	198	1 1/2"	340	2190	10.23	260	3.38	86	200	90
SS512M	50	198	2"	340	2190	10.23	260	3.38	86	200	90
SS752M	75	283	2 1/2"	400	2580	8.31	211	5.91	150	200	90
SS1002M	100	379	3"	500	3230	10.71	272	5.91	150	200	90

*By-Pass not available on this model

