
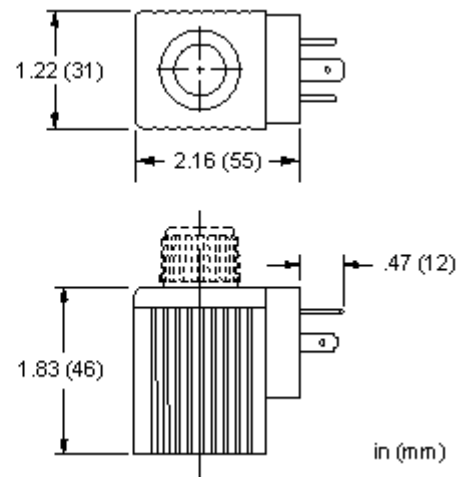


## 115 VAC 50/60 Hz coil with ISO/DIN 43650, Form A connector

Model:  
**760-211**



### Technical Features

- Coil windings utilize Class N, (392° F [200 °C] rated) magnet wire.
- Alternating current (AC) coils are DC coils that contain an integral full wave rectifier, model 2KPB10M, molded into the coil in addition to an MOV, model SIOV-S10K-130, for surge suppression. Because of this, there is no pull-in current and coils don't burn out if something prevents the valve from shifting.
- Encapsulating material: Mineral filled, glass fiber reinforced, epoxy molding compound.
- RoHS compliant. Restricted materials less than 0.1% total by weight.
- Power cable with mating connector is required and is not included with product.
- The coil is magnetically symmetrical and can be mounted in either direction on the solenoid tube without affecting performance.
- IP rating is dependent on the coil connector and the mating connector used.

### Technical Data

	U.S. Units	Metric Units
Arc Suppression		Standard
Maximum Coil Temperature at 68°F (20°C) Ambient		218°F (105°C)
Operating Voltage Range		+/- 20% nominal
Power Consumption (cold) - at rated voltage		12 watts
Voltage/Frequency		115 VAC 50/60 Hz
Connector Environment Rating		IP65
Duty cycle Rating		100 %

Connector	ISO/DIN 43650A, Form A	
Solenoid Tube Diameter	.56 in.	14,2 mm
Coil Nut Torque	4.5 lbf in.	0,5 Nm
Model Weight	0.32 lb.	0.15 kg.

---

---

## 760-211

U.S. Dollar ▼

**Recommended List Price**  
Shipping and Discount Terms

---

### What models can this kit be used on? ( [Click Here](#) )

DBAC

DBAA

DAAC

DACD

DAAA

DACC

---

### Related Information

Environmental Test Specification, S-367 in pdf format

---

### Instructions/Notes

- No Special Notes Available for selected model.