

## 4.5:1 pilot ratio, standard capacity counterbalance valve

Capacity:  
60 gpm (240  
L/min.)

Functional Group:



Products : Cartridges : Counterbalance : 3-Port Non-vented : Standard, 4.5:1  
Pilot Ratio

Model:  
CBGG-LKV

### Product Description

Counterbalance valves with pilot assist are meant to control an overrunning load. The check valve allows free flow from the directional valve (port 2) to the load (port 1) while a direct-acting, pilot-assisted relief valve controls flow from port 1 to port 2. Pilot assist at port 3 lowers the effective setting of the relief valve at a rate determined by the pilot ratio.

Other names for this valve include motion control valve and over center valve.

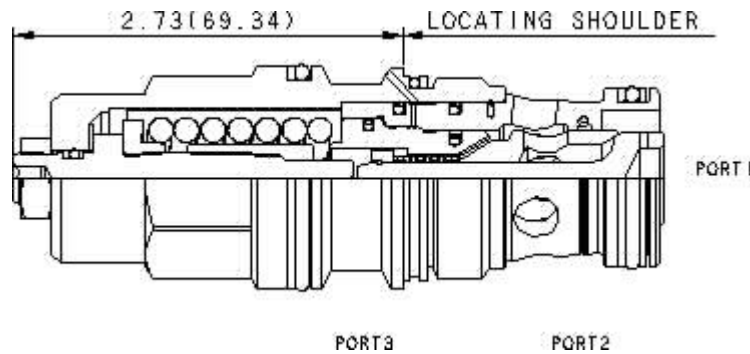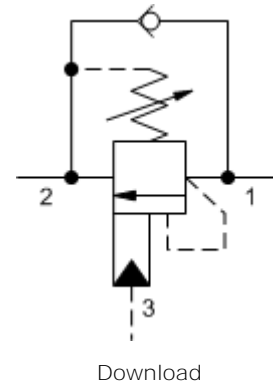





### Technical Features

- Counterbalance valves should be set at least 1.3 times the maximum load induced pressure.
- Sun counterbalance cartridges can be installed directly into a cavity machined in an actuator housing for added protection and improved stiffness in the circuit.
- Turn adjustment clockwise to decrease setting and release load.
- Two check valve cracking pressures are available. Use the 25 psi (1,7 bar) check unless actuator cavitation is a concern.
- Full clockwise setting is less than 200 psi (14 bar).
- This valve has positive seals between all ports.
- Backpressure at port 2 adds to the effective relief setting at a ratio of 1 plus the pilot ratio times the backpressure.
- All 3-port counterbalance, load control, and pilot-to-open check cartridges are physically interchangeable (i.e. same flow path, same cavity for a given frame size).
- Reseat exceeds 85% of set pressure when the valve is standard set. Settings lower than the standard set pressure may result in lower reseal percentages.
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

### Technical Data

--

	U.S. Units	Metric Units
Cavity	T-17A	
Capacity	60 gpm	240 L/min.
Pilot Ratio	4.5: 1	
Maximum Recommended Load Pressure at Maximum Setting	3850 psi	270 bar
Maximum Setting	5000 psi	350 bar
Adjustment - Number of Counterclockwise Turns to Increase Setting	3.75	
Factory Pressure Settings Established at	2 in <sup>3</sup> /min.	30 cc/min.
Maximum Valve Leakage at Reseat	5 drops/min.	0,4 cc/min.
Series (from Cavity)	Series 3	
Reseat	>85% of Set Pressure	
Valve Hex Size	1 1/4 in.	31,8 mm
Valve Installation Torque	150 - 160 lbf ft	200 - 215 Nm
Adjustment Screw Internal Hex Size	5/32 in.	4 mm
Adjustment Nut Hex Size	9/16 in.	15 mm
Adjustment Nut Torque	108 lbf in.	12 Nm
Model Weight	1.31 lb.	0.59 kg.
Seal Kits - Cartridge	Buna: 990-017-007	
Seal Kits - Cartridge	Viton: 990-017-006	

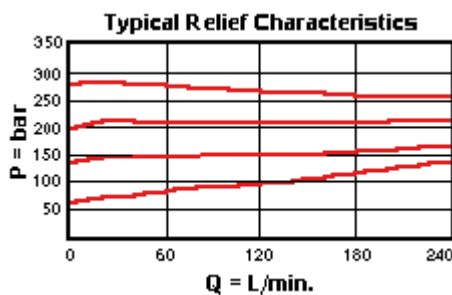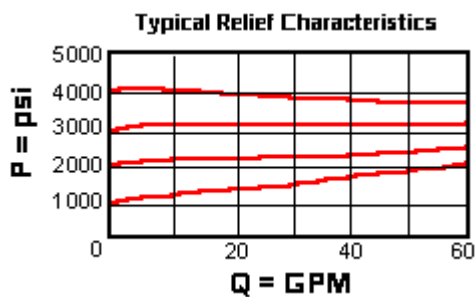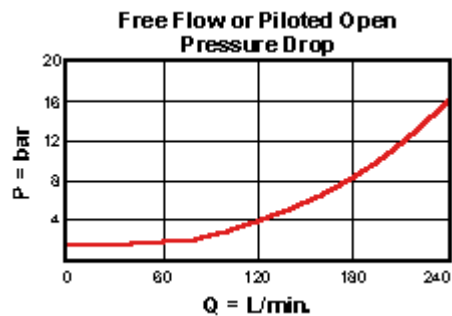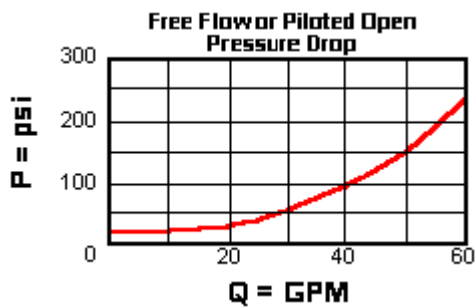

## CBGG-LKV

Control

Functional Setting Range

External Material/Seal Material

L Standard Screw Adjustment

K 1000 - 2500 psi w/25  
psi Check (70 - 175 bar  
w/1,7 bar Check), 2000  
psi (140 bar) Standard +0.00

V Viton +5.00

## Setting

If the material/seal is P, the control must be L or C  
If the material/seal is W, the control must be L or C

Customer specified setting stamped on hex \$1.10

- Explanation of Sun cartridge control options - US units.
- Explanation of Sun cartridge control options - metric units.

| | | | |

Copyright © 2008-2009 Sun Hydraulics Corporation. All rights reserved.  
Terms and Conditions - ISO Certification - Statement of Privacy