

Standard capacity counterbalance valve without pilot assist

Capacity:
15 gpm (60
L/min.)


Functional Group:

Products : Cartridges : Counterbalance : 3-Port Non-vented, Without Pilot
Assist : Standard, Zero Pilot Ratio


Model:
CCCA-LAN

Product Description

Counterbalance valves without pilot assist are meant to control an overrunning load. The check valve allows free flow from the directional valve (port 2) to the load (port 1) while a direct-acting relief valve controls flow from port 1 to port 2.



Download

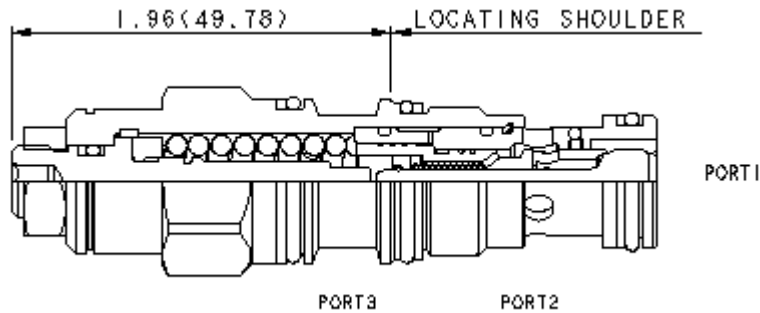

Technical Features



- Counterbalance valves should be set at least 1.3 times the maximum load induced pressure.
- Full clockwise setting is less than 200 psi (14 bar).
- Backpressure at port 2 is directly additive to the relief setting of the valve.
- Reseat exceeds 85% of set pressure when the valve is standard set. Settings lower than the standard set pressure may result in lower reseal percentages.
- Two check valve cracking pressures are available. Use the 25 psi (1,7 bar) check unless actuator cavitation is a concern.
- Stainless steel cartridge options P or W are
- Turn adjustment clockwise to decrease setting and release load.
- These valves are modified versions of our pilot assisted counterbalance valves. The pilot assist area has been nullified internally. There is no connection to port 3.
- Lower pilot ratios (pilot gain) promote machine stability. This valve has a pilot ratio of zero. Stability is gained at the expense of efficiency.
- Sun counterbalance cartridges can be installed directly into a cavity machined in an actuator housing for added protection and improved stiffness in the circuit.
- All 3-port counterbalance, load control, and pilot-to-open check cartridges are physically interchangeable (i.e. same flow path, same cavity for a given frame size).
- Incorporates the Sun floating style construction to

intended for use within corrosive environments with all external components manufactured in stainless steel or titanium. Internal working components remain the same as the standard valves.

minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

Technical Data

	U.S. Units	Metric Units
Model Weight	0.34 lb.	0.15 kg.
Cavity	T-11A	
Capacity	15 gpm	60 L/min.
Pilot Ratio	Zero	
Maximum Recommended Load Pressure at Maximum Setting	3075 psi	215 bar
Maximum Setting	4000 psi	280 bar
Adjustment - Number of Counterclockwise Turns to Increase Setting	3.75	
Factory Pressure Settings Established at	2 in ³ /min.	30 cc/min.
Maximum Operating Pressure	5000 psi	350 bar
Maximum Valve Leakage at Reseat	5 drops/min.	0,4 cc/min.
Series (from Cavity)	Series 1	
Reseat	>85% of Set Pressure	
Valve Hex Size	7/8 in.	22,2 mm
Valve Installation Torque	30 - 35 lbf ft	45 - 50 Nm
Adjustment Screw Hex Socket Size	5/32 in.	4 mm
Adjustment Nut Hex Size	9/16 in.	15 mm
Adjustment Nut Torque	108 lbf in.	12 Nm
Seal Kits	Buna: 990-011-007	
Seal Kits	Viton: 990-011-006	

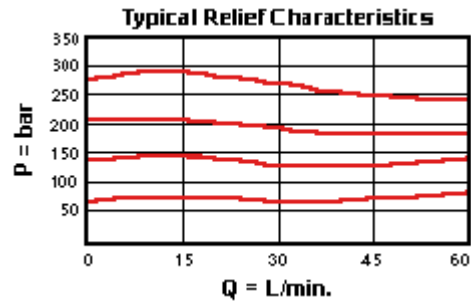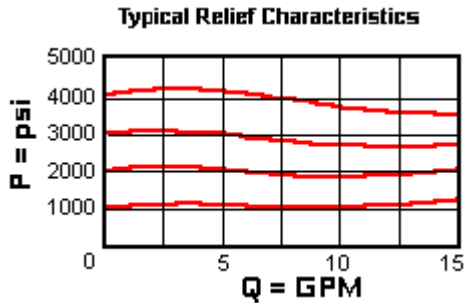

CCCA-LAN

Control

Functional Setting Range

External Material/Seal Material

L Standard Screw Adjustment +0.00 A 1000 - 4000 psi w/4 psi Check (70 - 280 bar w/o,3 bar Check), 3000 +2.00 psi (210 bar) Standard Setting N Buna-N +0.00

If the material/seal is P, the control must be L or C
If the material/seal is W, the control must be L or C

* Special Setting required, specify at time of order
Customer specified setting stamped on hex \$1.10

- Explanation of Sun cartridge control options - US units.
- Explanation of Sun cartridge control options - metric units.

Copyright © 2007-2008 Sun Hydraulics Corporation. All rights reserved.
Terms and Conditions - ISO Certification - Statement of Privacy