


# D03 Subplates with Relief Cavity

## Dual Ported Subplate with Main Relief Cavity

Valve mtg: UNC #10-24 x 0.63 DP or  
Metric M5-0.8mm ISO 6H x [16] DP

Subplate hardware kit is supplied.  
See page 121 for itemized list.

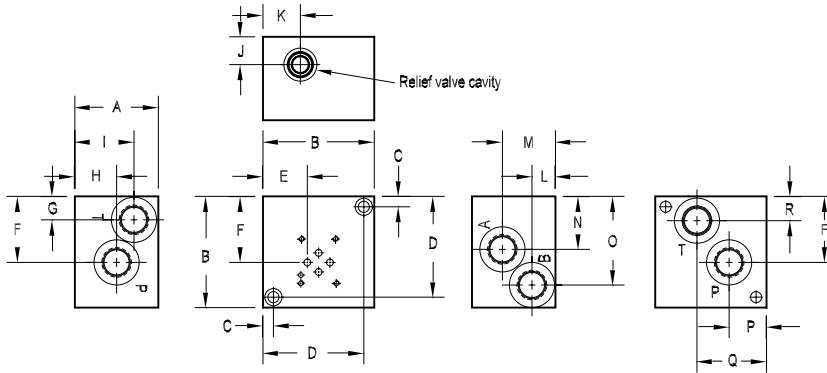

Dimension	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R
*D03SPRV*6*	2.25 [57.2]	3.00 [76.2]	0.31 [7.9]	2.69 [68.3]	0.97 [24.6]	2.00 [50.8]	0.69 [17.5]	1.66 [42.1]	1.66 [42.1]	0.88 [22.2]	0.84 [21.3]	0.88 [22.2]	1.63 [41.3]	1.53 [38.9]	2.37 [60.2]	0.97 [24.6]	1.69 [42.9]	0.69 [17.5]
*D03SPRV*8*	3.00 [76.2]	3.50 [88.9]	0.38 [9.5]	3.12 [79.4]	1.34 [34.1]	2.19 [55.6]	0.81 [20.6]	1.50 [38.1]	2.00 [50.8]	1.00 [25.4]	1.09 [22.8]	0.84 [21.4]	1.91 [48.4]	1.72 [43.6]	2.53 [64.3]	1.09 [22.8]	2.25 [57.2]	0.81 [20.6]
*D03SPRV*12*	3.00 [76.2]	4.00 [101.6]	0.38 [9.5]	3.63 [92.1]	1.59 [40.5]	2.38 [60.3]	0.84 [21.4]	1.50 [38.1]	2.13 [54.0]	1.00 [25.4]	1.34 [34.1]	0.84 [21.4]	1.91 [48.4]	1.91 [48.4]	3.19 [81.0]	1.34 [34.1]	2.50 [63.5]	0.88 [22.2]

Specifications, descriptions, and dimensional data are subject to correction or change without notice or incurring obligation.  
Download latest catalog page revisions at [www.damanifolds.com](http://www.damanifolds.com).

## Ordering Information

Material	Valve Pattern	Product Type	Circuit	Relief Cavity	Port Threads																																																														
<table border="1"> <thead> <tr> <th colspan="2">Material</th> </tr> </thead> <tbody> <tr> <td><b>A</b></td> <td>Aluminum - 6061-T6 3000<sup>†</sup> psi • 20.7 MPa</td> </tr> <tr> <td><b>D</b></td> <td>Ductile Iron - D4512 5000<sup>†</sup> psi • 34.5 MPa</td> </tr> <tr> <td colspan="2"> <sup>†</sup> Working pressure should be considered in accordance with ISO 4413 to determine appropriate material type.                 </td> </tr> </tbody> </table>	Material		<b>A</b>	Aluminum - 6061-T6 3000 <sup>†</sup> psi • 20.7 MPa	<b>D</b>	Ductile Iron - D4512 5000 <sup>†</sup> psi • 34.5 MPa	<sup>†</sup> Working pressure should be considered in accordance with ISO 4413 to determine appropriate material type.		<table border="1"> <thead> <tr> <th colspan="2">Valve Pattern</th> </tr> </thead> <tbody> <tr> <td><b>D03</b></td> <td>ISO 4401-03-02 NFPA T3.5.1-D03 See Tech Information</td> </tr> </tbody> </table>	Valve Pattern		<b>D03</b>	ISO 4401-03-02 NFPA T3.5.1-D03 See Tech Information	<table border="1"> <thead> <tr> <th colspan="2">Product Type</th> </tr> </thead> <tbody> <tr> <td><b>SP</b></td> <td>Subplate</td> </tr> </tbody> </table>	Product Type		<b>SP</b>	Subplate	<table border="1"> <thead> <tr> <th colspan="2">Circuit</th> </tr> </thead> <tbody> <tr> <td><b>RV</b></td> <td>Main Relief P to T</td> </tr> </tbody> </table>	Circuit		<b>RV</b>	Main Relief P to T	<table border="1"> <thead> <tr> <th colspan="2">Relief Cavity</th> </tr> </thead> <tbody> <tr> <td><b>C</b></td> <td>Common cavity C-10-2 (P in nose)</td> </tr> <tr> <td><b>S</b></td> <td>Sun Cavity T-10A (P in nose) See Tech Info for valves</td> </tr> </tbody> </table>	Relief Cavity		<b>C</b>	Common cavity C-10-2 (P in nose)	<b>S</b>	Sun Cavity T-10A (P in nose) See Tech Info for valves	<table border="1"> <thead> <tr> <th colspan="6">Port Threads</th> </tr> </thead> <tbody> <tr> <td><b>6P</b></td> <td>0.38-18 NPTF ANSI B1.20.3</td> <td><b>8P</b></td> <td>0.50-14 NPTF ANSI B1.20.3</td> <td><b>12P</b></td> <td>0.75-14 NPTF ANSI B1.20.3</td> </tr> <tr> <td><b>6S</b></td> <td>-6 SAE ISO 11926; SAE 1926</td> <td><b>8S</b></td> <td>-8 SAE ISO 11926; SAE 1926</td> <td><b>12S</b></td> <td>-12 SAE ISO 11926; SAE 1926</td> </tr> <tr> <td><b>6B</b></td> <td>0.38-19 BSPP ISO 1179; BS 2779</td> <td><b>8B</b></td> <td>0.50-14 BSPP ISO 1179; BS 2779</td> <td><b>12B</b></td> <td>0.75-14 BSPP ISO 1179; BS 2779</td> </tr> <tr> <td><b>6M</b></td> <td>M14 x 1.5 ISO 6149</td> <td><b>8M</b></td> <td>M18 x 1.5 ISO 6149</td> <td><b>12M</b></td> <td>M27 x 2.0 ISO 6149</td> </tr> <tr> <td><b>6T</b></td> <td>0.38-19 BSPT ISO 7; BS 21</td> <td><b>8T</b></td> <td>0.50-14 BSPT ISO 7; BS 21</td> <td><b>12T</b></td> <td>0.75-14 BSPT ISO 7; BS 21</td> </tr> </tbody> </table>	Port Threads						<b>6P</b>	0.38-18 NPTF ANSI B1.20.3	<b>8P</b>	0.50-14 NPTF ANSI B1.20.3	<b>12P</b>	0.75-14 NPTF ANSI B1.20.3	<b>6S</b>	-6 SAE ISO 11926; SAE 1926	<b>8S</b>	-8 SAE ISO 11926; SAE 1926	<b>12S</b>	-12 SAE ISO 11926; SAE 1926	<b>6B</b>	0.38-19 BSPP ISO 1179; BS 2779	<b>8B</b>	0.50-14 BSPP ISO 1179; BS 2779	<b>12B</b>	0.75-14 BSPP ISO 1179; BS 2779	<b>6M</b>	M14 x 1.5 ISO 6149	<b>8M</b>	M18 x 1.5 ISO 6149	<b>12M</b>	M27 x 2.0 ISO 6149	<b>6T</b>	0.38-19 BSPT ISO 7; BS 21	<b>8T</b>	0.50-14 BSPT ISO 7; BS 21	<b>12T</b>	0.75-14 BSPT ISO 7; BS 21
Material																																																																			
<b>A</b>	Aluminum - 6061-T6 3000 <sup>†</sup> psi • 20.7 MPa																																																																		
<b>D</b>	Ductile Iron - D4512 5000 <sup>†</sup> psi • 34.5 MPa																																																																		
<sup>†</sup> Working pressure should be considered in accordance with ISO 4413 to determine appropriate material type.																																																																			
Valve Pattern																																																																			
<b>D03</b>	ISO 4401-03-02 NFPA T3.5.1-D03 See Tech Information																																																																		
Product Type																																																																			
<b>SP</b>	Subplate																																																																		
Circuit																																																																			
<b>RV</b>	Main Relief P to T																																																																		
Relief Cavity																																																																			
<b>C</b>	Common cavity C-10-2 (P in nose)																																																																		
<b>S</b>	Sun Cavity T-10A (P in nose) See Tech Info for valves																																																																		
Port Threads																																																																			
<b>6P</b>	0.38-18 NPTF ANSI B1.20.3	<b>8P</b>	0.50-14 NPTF ANSI B1.20.3	<b>12P</b>	0.75-14 NPTF ANSI B1.20.3																																																														
<b>6S</b>	-6 SAE ISO 11926; SAE 1926	<b>8S</b>	-8 SAE ISO 11926; SAE 1926	<b>12S</b>	-12 SAE ISO 11926; SAE 1926																																																														
<b>6B</b>	0.38-19 BSPP ISO 1179; BS 2779	<b>8B</b>	0.50-14 BSPP ISO 1179; BS 2779	<b>12B</b>	0.75-14 BSPP ISO 1179; BS 2779																																																														
<b>6M</b>	M14 x 1.5 ISO 6149	<b>8M</b>	M18 x 1.5 ISO 6149	<b>12M</b>	M27 x 2.0 ISO 6149																																																														
<b>6T</b>	0.38-19 BSPT ISO 7; BS 21	<b>8T</b>	0.50-14 BSPT ISO 7; BS 21	<b>12T</b>	0.75-14 BSPT ISO 7; BS 21																																																														