


Functional Group: Products : Manifolds : Sandwich : Check : ISO 05 X and Y : On P high capacity

Model: DJO

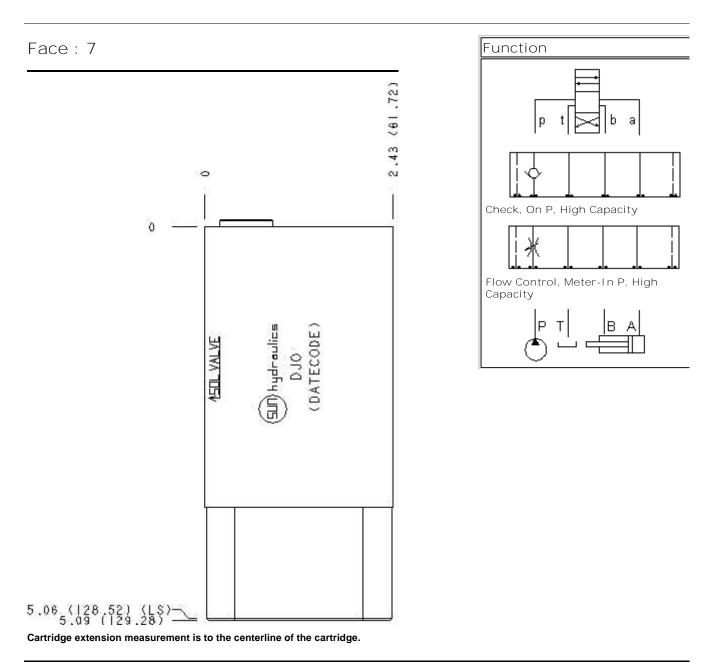

Aluminum Body Pressure Rating: **3000 psi (210 bar)** Ductile Iron Body Pressure Rating: **5000 psi (350 bar)**

Technical Data

	U.S. Units	Metric Units
Model Weight	2.37 lb.	1.08 kg.
Cavity	T-16A	

Body Features	Into P		
Body Type	Sandwich		
Interface	ISO 05 - X&Y		
Open Cavity Quantity	1		
Stack Height	2.49 in.	63 mm	

Option Selection:

Model Code	Description
DJO	Aluminum, Buna-N, U.S. Units
DJO/S	Ductile Iron, Buna-N, U.S. Units
DJO/V	Aluminum, Viton, U.S. Units
DJO/Y	Ductile Iron, Viton, U.S. Units

Special Notes :


For check valve application, use only with CX*A check valves - free flow nose to side.

Related Information :

- The retainer and seal kit used with this ISO 05 X and Y sandwich determines which pattern, either European or US, is active. It must be ordered separately. Click here for more information.
- 1 Studnuts and Studrods for sandwich bodies metric units.
- 1 Studnuts and Studrods for sandwich bodies US units




Functional Group: Products : Manifolds : Sandwich : Check : ISO 05 X and Y : On P high capacity Model: DJO

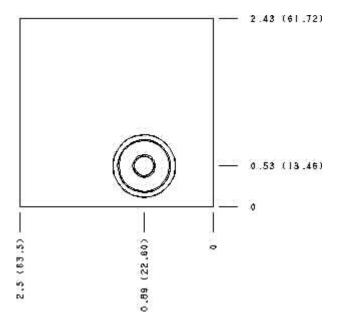




Functional Group:	Model:
Products : Manifolds : Sandwich : Check : ISO 05 X and Y : On P high capacity	DJO

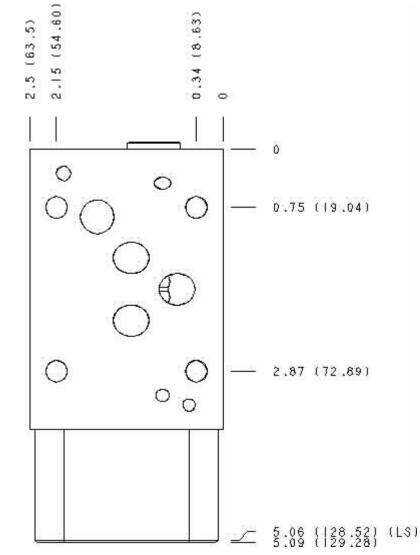




Functional Group: Products : Manifolds : Sandwich : Check : ISO 05 X and Y : On P high capacity Model: DJO

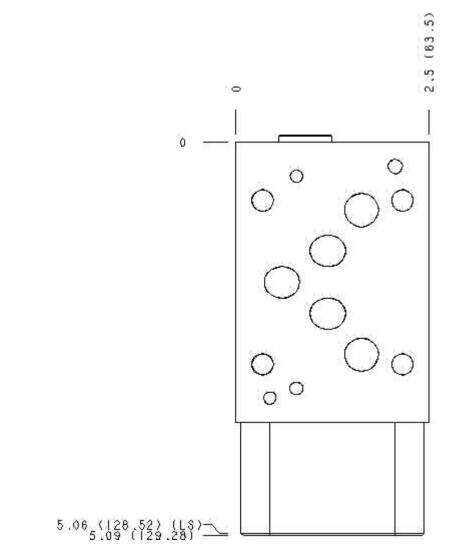



Functional Group:	
Products : Manifolds : Sandwich : Check : ISO 05 X and Y : On P high capacity	

Model: DJO

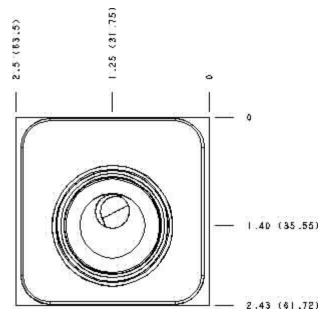





Functional Group:	
Products : Manifolds : Sandwich : Check : ISO 05 X and	Model:
Y : On P high capacity	DJO



All Dimensions in Inches(mm)

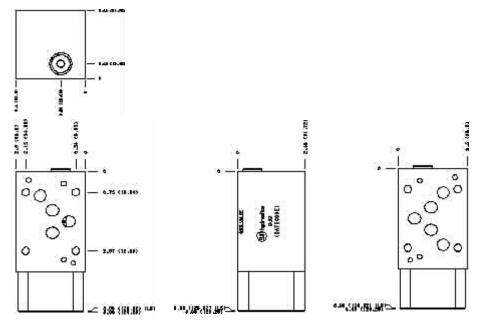



Copyright © 2007-2008 Sun Hydraulics Corporation. All rights reserved. <u>Terms and Conditions</u> - <u>Statement of Privacy</u>