



MFS-MFS Straight FS2403 Series

SAE # 520101

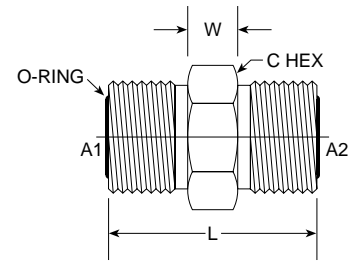

PART NO. SIZE	TUBE O.D.	A1 THREAD	A2 THREAD	L LGTH	M.M.	W WIDTH	M.M.	C HEX	C HEX	M.M.	Standard Material From Stock			
											S	FG	SS	B
FS2403-04-04	1/4	9/16-18	9/16-18	1.080	27.43	0.310	7.87	5/8	0.625	15.87	•			
FS2403-06-04	3/8 1/4	11/16-16	9/16-18	1.170	29.72	0.340	8.64	3/4	0.750	19.05	•			
FS2403-06-06	3/8	11/16-16	11/16-16	1.220	30.99	0.340	8.64	3/4	0.750	19.05	•			
FS2403-08-06	1/2 3/8	13/16-16	11/16-16	1.330	33.78	0.390	9.91	7/8	0.875	22.22	•			
FS2403-08-08	1/2	13/16-16	13/16-16	1.390	35.31	0.390	9.91	7/8	0.875	22.22	•			
FS2403-10-08	5/8 1/2	1-14	13/16-16	1.570	39.88	0.460	11.68	1 1/16	1.062	26.97	•			
FS2403-10-10	5/8	1-14	1-14	1.680	42.67	0.460	11.68	1 1/16	1.062	26.97	•			
NEW FS2403-12-08											•			
FS2403-12-10	3/4 5/8	1 3/16-12	1-14	1.800	45.72	0.520	13.20	1 1/4	1.250	31.75	•			
FS2403-12-12	3/4	1 3/16-12	1 3/16-12	1.850	46.99	0.520	13.20	1 1/4	1.250	31.75	•			
FS2403-16-12	1 3/4	1 7/16-12	1 3/16-12	1.920	48.77	0.560	14.22	1 1/2	1.500	38.10	•			
FS2403-16-16	1	1 7/16-12	1 7/16-12	1.940	49.28	0.560	14.22	1 1/2	1.500	38.10	•			
NEW FS2403-20-20	1 1/4	1 11/16-12	1 11/16-12	2.020	51.31	0.640	16.26	1 3/4	1.750	44.45	•			
FS2403-24-24	1 1/2	2-12	2-12	2.090	53.09	0.710	18.03	2 1/8	2.125	53.97	•			

MFS-MP Straight FS2404 Series

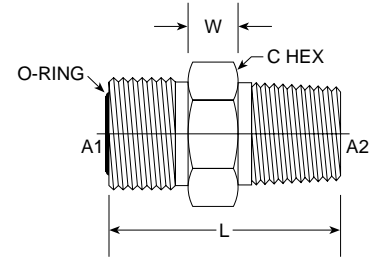

PART NO. SIZE	TUBE O.D.	A1 THREAD	A2 THREAD	L LGTH	M.M.	W WIDTH	M.M.	C HEX	C HEX	M.M.	Standard Material From Stock			
											S	FG	SS	B
FS2404-04-02	1/4	9/16-18	1/8-27	1.070	27.18	0.270	6.86	5/8	0.625	15.87	•			
FS2404-04-04	1/4	9/16-18	1/4-18	1.260	32.00	0.270	6.86	5/8	0.625	15.87	•			
FS2404-04-06	1/4	9/16-18	3/8-18	1.320	33.53	0.270	6.86	3/4	0.750	19.05	•			
FS2404-04-08	1/4	9/16-18	1/2-14	1.500	38.10	0.270	6.86	7/8	0.875	22.22	•			
NEW FS2404-06-02											•			
FS2404-06-04	3/8	11/16-16	1/4-18	1.250	31.75	0.310	7.87	3/4	0.750	19.05	•			
FS2404-06-06	3/8	11/16-16	3/8-18	1.340	34.04	0.310	7.87	3/4	0.750	19.05	•			
FS2404-06-08	3/8	11/16-16	1/2-14	1.550	39.37	0.310	7.87	7/8	0.875	22.22	•			
FS2404-08-04	1/2	13/16-16	1/4-18	1.480	37.59	0.350	8.89	7/8	0.875	22.22	•			
FS2404-08-06	1/2	13/16-16	3/8-18	1.480	37.59	0.350	8.89	7/8	0.875	22.22	•			
FS2404-08-08	1/2	13/16-16	1/2-14	1.640	41.66	0.350	8.89	7/8	0.875	22.22	•			
FS2404-08-12	1/2	13/16-16	3/4-14	1.690	42.93	0.410	10.41	1 1/8	1.125	28.57	•			
FS2404-10-08	5/8	1-14	1/2-14	1.820	46.23	0.410	10.41	1 1/16	1.062	26.97	•			
FS2404-10-12	5/8	1-14	3/4-14	1.820	46.23	0.410	10.41	1 1/8	1.125	28.57	•			
FS2404-10-16	5/8	1-14	1-11 1/2	1.950	49.53	0.380	9.65	1 3/8	1.375	34.93	•			
FS2404-12-08	3/4	1 3/16-12	1/2-14	1.930	49.02	0.410	10.41	1 1/4	1.250	31.75	•			
FS2404-12-12	3/4	1 3/16-12	3/4-14	1.930	49.02	0.410	10.41	1 1/4	1.250	31.75	•			
FS2404-12-16	3/4	1 3/16-12	1 11-1/2	2.130	54.10	0.410	10.41	1 3/8	1.375	34.92	•			
FS2404-16-12	1	1 7/16-12	3/4-14	2.000	50.80	0.410	10.41	1 1/2	1.500	38.10	•			
FS2404-16-16	1	1 7/16-12	1 11-1/2	2.190	55.63	0.410	10.41	1 1/2	1.500	38.10	•			
FS2404-16-20	1	1 7/16-12	1 1/4-11 1/2	2.30	58.42	0.620	15.75	1 11/16	1.6875	42.86	•			
FS2404-16-24	1	1 7/16-12	1 1/2-11 1/2	2.15	54.61	0.445	11.30	2	2.000	50.80	•			
FS2404-20-16	1 1/4	1 11/16-12	1-11 1/2	2.300	58.42	.645	16.38	1 3/4	1.750	44.45	•			
FS2404-20-20	1 1/4	1 11/16-12	1 1/4-11 1/2	2.300	58.42	0.410	10.41	1 7/8	1.875	47.62	•			
FS2404-24-24	1 1/2	2-12	1 1/2-11 1/2	2.400	60.96	0.410	10.41	2 1/8	2.125	53.97	•			