


Functional Group: Model:


Products: Manifolds: Line mount: Relief: 2 Port: Through port 1 with gage port

IEF

Aluminum Body Pressure Rating: 3000 psi (210 bar) Ductile Iron Body Pressure Rating: 5000 psi (350 bar)



Face: 7

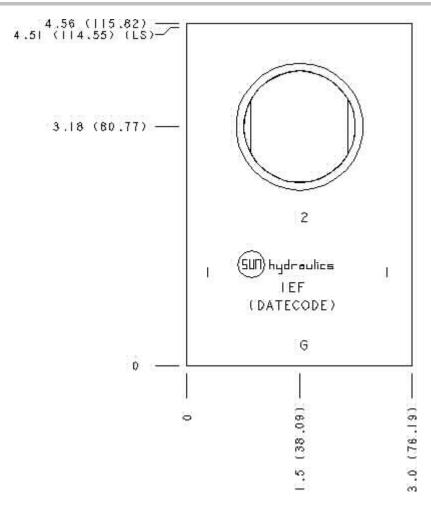

Cartridge extension measurement is to the centerline of the cartridge.

Port Headings and Sizes

IEF Ports 1 & 2 1 1/4" NPTF Gage Port 1/4" NPTF IEF

Technical Data		
	U.S. Units	Metric Units
Model Weight	2.89 lb.	1.31 kg.
Cavity	T-16A	
Body Features	Through port with gauge port	
Body Type	Line mount	
Interface	None	
Open Cavity Quantity	1	
Mounting Hole Thread	.375-16 UNC - 2B in.	
Mounting Hole Depth	.62 in.	15,7 mm
Mounting Hole Quantity	2	

Option Selection

U.S. Dollar ▼

Model Code IEF

IEF/S

Description Aluminum, Buna-N, U.S. Units Ductile Iron, Buna-N, U.S. Units

## Special Notes

• No Special Notes Available for selected model.

Copyright © 2007-2008 Sun Hydraulics Corporation. All rights reserved. Terms and Conditions - ISO Certification - Statement of Privacy