


Functional Group: Model:


Products: Manifolds: Line mount: Relief: 2 Port: Through port 1 with gage port

LE6

Aluminum Body Pressure Rating: 3000 psi (210 bar) Ductile Iron Body Pressure Rating: 5000 psi (350 bar)



Face: 7

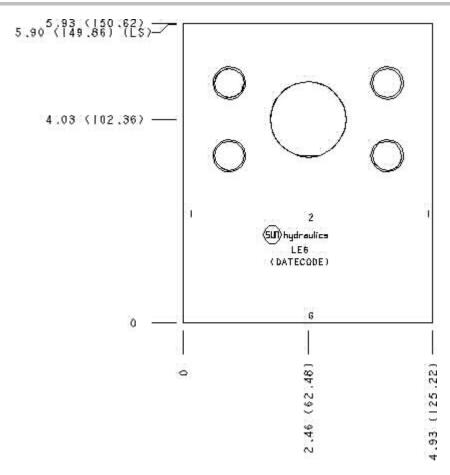

Cartridge extension measurement is to the centerline of the cartridge.

Port Headings and Sizes

LE6/M Ports 1 & 2 1 1/2" Code 62 LE6/M Gage Port 1/4" BSPP LE6 Ports 1 & 2 1 1/2" Code 62 LE6 Gage Port 1/4" NPTF

Technical Data		
	U.S. Units Metric	c Units
Model Weight	11.54 lb. 5.23	3 kg.
Cavity	T-18A	
Body Features	Through port with gauge p	ort
Body Type	Line mount	
Interface	None	
Open Cavity Quantity	1	
Mounting Hole Thread	.500-13 UNC - 2B in.	
Mounting Hole Depth	.75 in. 19	mm
Mounting Hole Quantity	2	

Option Selection

U.S. Dollar ▼

Model Code Description
LE6/M Aluminum, Buna-N, Metric
LE6 Aluminum, Buna-N, U.S. Units
LE6/T Ductile Iron, Buna-N, Metric
LE6/S Ductile Iron, Buna-N, U.S. Units

## Special Notes

• No Special Notes Available for selected model.

Copyright © 2007-2008 Sun Hydraulics Corporation. All rights reserved. Terms and Conditions - ISO Certification - Statement of Privacy