


Model: NAL

Aluminum Body Pressure Rating: 3000 psi (210 bar) Ductile Iron Body Pressure Rating: 5000 psi (350 bar)

Face: 6

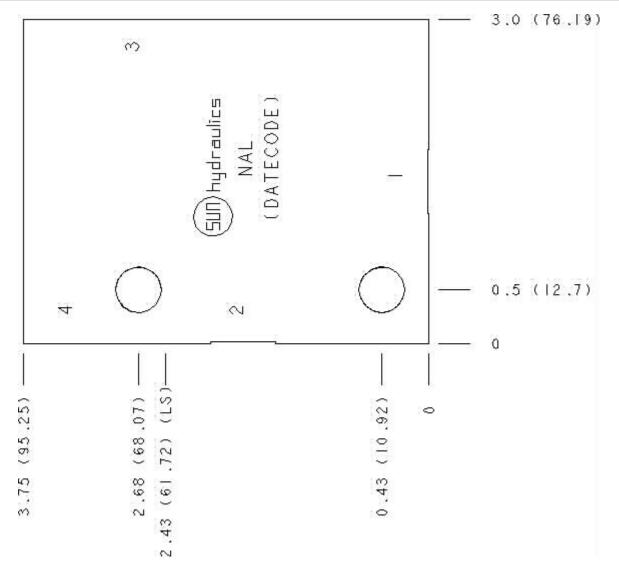

Cartridge extension measurement is to the centerline of the cartridge.

NAL	Ports 1 & 2	SAE 12
NAL	Port 3	SAE 10
NAL	Port 4	SAE 6

Technical Data

	U.S. Units	Metric Units
Model Weight	1.17 lb.	0.53 kg.
Cavity	T-22A	
Body Features	Ninety degree	
Body Type	Line mount	
Interface	None	
Open Cavity Quantity	1	
Mounting Hole Diameter	.42 in.	10,7 mm
Mounting Hole Depth	Through	
Mounting Hole Quantity	2	

Option Selection

U.S. Dollar 💌

Model Code	Description
NAL	Aluminum, Buna-N, U.S. Units
NAL/S	Ductile Iron, Buna-N, U.S. Units

Special Notes

• No Special Notes Available for selected model.

Copyright © 2007-2008 Sun Hydraulics Corporation. All rights reserved. Terms and Conditions - ISO Certification - Statement of Privacy