

Fully adjustable needle valve

Capacity:

.56 in. (14,2 mm)

Functional Group:

Products: Cartridges: Flow Control: 2 Port: Fully Adjustable Needle Valve


Model: NFFC-LGN

Product Description

Needle valves are fully adjustable orifices used to regulate flow. They are infinitely adjustable from fully closed up to the maximum orifice diameter. They are not pressure-compensated. They may be used as flow controls or as shutoff valves.



Download

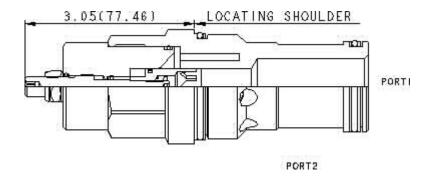


Technical Features


- All 2-port flow control cartridges are physically and
 Because needle valves are non-compensating functionally interchangeable (i.e. same flow path, same cavity for a given frame size). However, cartridge extension dimensions from the mounting surface may vary.
- A balanced adjustment mechanism allows for easy adjustment even at high pressures.
- The flow path through this valve is bi-directional. The preferred path is port 1 to 2, to allow interchangeability with other flow controls.
- devices, the fixed orifice size will regulate flow through the valve in proportion to the square root of the pressure differential across ports 1 and 2.
- The sharp-edged orifice design minimizes flow variations due to viscosity changes.
- There is no leakage when the adjustment mechanism is turned to the shut-off position.

Technical Data

recrimed Bata		
	U.S. Units	Metric Units
Model Weight	5.28 lb.	2.40 kg.
Cavity	T-18A	
Capacity	.56 in.	14,2 mm
Adjustment - Number of Counterclockwise Turns - Fully Closed to Fully Open	5	
Maximum Operating Pressure	5000 psi	350 bar
Series (from Cavity)	Series 4	
Valve Hex Size	1 5/8 in.	41,3 mm
Valve Installation Torque	350 - 375 lbf ft	465 - 500 Nm
Adjustment Screw Hex Socket Size	5/32 in.	4 mm
Adjustment Nut Hex Size	9/16 in.	15 mm
Adjustment Nut Torque	108 lbf in.	12 Nm
Seal Kits	Buna: 990-018-007	

Seal Kits Viton: 990-018-006





NFFC-LGN

Control Maximum Orifice Diameter

External Material/Seal Material

L Standard Screw Adjustment

+0.00 G .56 in. (14,2 mm) +0.00

N Buna-N +0.00

Stainless material/seal options not available for this model

- Explanation of Sun cartridge control options US units.
- Explanation of Sun cartridge control options metric units.

Copyright © 2007-2008 Sun Hydraulics Corporation. All rights reserved. Terms and Conditions - ISO Certification - Statement of Privacy