



Functional Group: Model: Products: Manifolds: Line mount: Circuit Saver: 4 Port: Ninety degree with gage port PAN

Aluminum Body Pressure Rating: 3000 psi (210 bar)

Ductile Iron Body Pressure Rating: 5000 psi (350 bar)



Face: 6

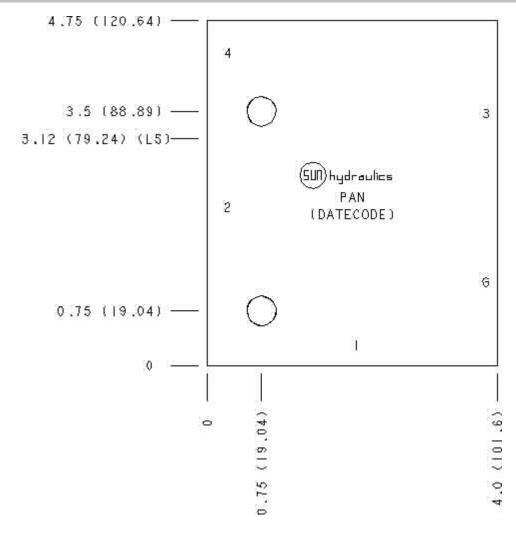

Cartridge extension measurement is to the centerline of the cartridge.

Port Headings and Sizes

 PAN
 Ports 1 & 2
 SAE 20

 PAN
 Port 3
 SAE 12

PAN Port 4 SAE 6 PAN Gage Port 1/4" NPTF

т	ack	nnic	· つ l	Data

	U.S. Units	Metric Units	
Model Weight	3.02 lb.	1.37 kg.	
Cavity	T-23A		
Body Features	Ninety degree with gauge port		
Body Type	Line mount		
Interface	None		
Open Cavity Quantity	1		
Mounting Hole Diameter	.41 in.	10,4 mm	
nting Hole Depth Through		ough	
Mounting Hole Quantity	2		

Option Selection U.S. Dollar

Model Code Description
PAN Aluminum, Buna-N, U.S. Units
PAN/S Ductile Iron, Buna-N, U.S. Units

## Special Notes

• No Special Notes Available for selected model.

Copyright © 2007-2008 Sun Hydraulics Corporation. All rights reserved. Terms and Conditions - ISO Certification - Statement of Privacy