

**CONFIGURATION**

<b>F</b>	Control	Hex Head Screw with Locknut
<b>A</b>	Adjustment Range	100 - 3000 psi (7 - 210 bar), 1000 psi (70 bar) Standard Setting
<b>N</b>	Seal Material	Buna-N
<b>(none)</b>	Material/Coating	Standard Material/Coating

Pilot-operated, balanced piston sequence valves will supply a secondary circuit with flow once the pressure at the inlet (port 1) has exceeded the valve setting. The pressure setting of a sequence valve controls the pressure at port 1 relative to the pressure at the drain (port 3). These valves are insensitive to back pressure at port 2 (sequence), up to the valve setting. They may be used to regulate pressure in place of 2-port relief valves if there is pressure in the return line.

**TECHNICAL DATA**

Factory Pressure Settings Established at	4 gpm
Maximum Operating Pressure	5000 psi
Control Pilot Flow	10 - 15 in <sup>3</sup> /min.
Response Time - Typical	10 ms
Maximum Valve Leakage at 110 SUS (24 cSt)	3 in <sup>3</sup> /min. @1000 psi
Adjustment - Number of Clockwise Turns to Increase Setting	5
Locknut Hex Size	9/16 in.
Locknut Torque	80 - 90 lbf in.
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	EPDM: 990-202-014
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006

**NOTES** For Series 1 cartridges configured with an O control (panel mount handknob), a .75 in. (19 mm) diameter hole is required in the panel.

**CONFIGURATION OPTIONS**


**Model Code Example: RSFCFAN**

<b>CONTROL</b>	<b>(F) ADJUSTMENT RANGE</b>	<b>(A) SEAL MATERIAL</b>	<b>(N) MATERIAL/COATING</b>
<b>F</b> Hex Head Screw with Locknut	<b>A</b> 100 - 3000 psi (7 - 210 bar), 1000 psi (70 bar) Standard Setting	<b>N</b> Buna-N	Standard Material/Coating
<b>L</b> Standard Screw Adjustment		<b>E</b> EPDM	/AP Stainless Steel, Passivated
<b>C</b> Tamper Resistant - Factory Set	<b>W</b> 150 - 4500 psi (10,5 - 315 bar), 1000 psi (70 bar) Standard Setting	<b>V</b> Viton	
<b>J</b> Capped Screw Adjustment	<b>B</b> 50 - 1500 psi (3,5 - 105 bar), 1000 psi (70 bar) Standard Setting		
<b>K</b> Handknob	<b>C</b> 150 - 6000 psi (10,5 - 420 bar), 1000 psi (70 bar) Standard Setting		
<b>O</b> Handknob with Panel Mount	<b>D</b> 25 - 800 psi (1,7 - 55 bar), 400 psi (28 bar) Standard Setting		
<b>W</b> Hex Wrench Adjustment	<b>E</b> 25 - 400 psi (1,7 - 28 bar), 200 psi (14 bar) Standard Setting		
<b>Y</b> Tri-Grip Handknob	<b>N</b> 60 - 800 psi (4 - 55 bar), 400 psi (28 bar) Standard Setting		
	<b>Q</b> 60 - 400 psi (4 - 28 bar), 200 psi (14 bar) Standard Setting		

**TECHNICAL FEATURES**

- All 3 port sequence cartridges are physically and functionally interchangeable (i.e. same flow path, same cavity for a given frame size).
- Pilot flow continues to increase as the pressure at port 1 (inlet), relative to the pressure at port 3 (drain), rises above the valve setting.
- The main stage orifice is protected by a 150 micron stainless steel screen.
- Pressure at port 3 is directly additive to the valve setting at a 1:1 ratio and should not exceed 5000 psi (350 bar).
- Not suitable for use in load holding applications due to spool leakage.
- W and Y controls (where applicable) can be specified with or without a special setting. When no special setting is specified, the valve is adjustable throughout its full range using the W or Y control. When a special setting is specified, this setting represents the maximum setting of the valve.
- Cartridges with EPDM seals are for use in systems with phosphate ester fluids. Exposure to petroleum based fluids, greases and lubricants will damage the seals.
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

## PERFORMANCE CURVES

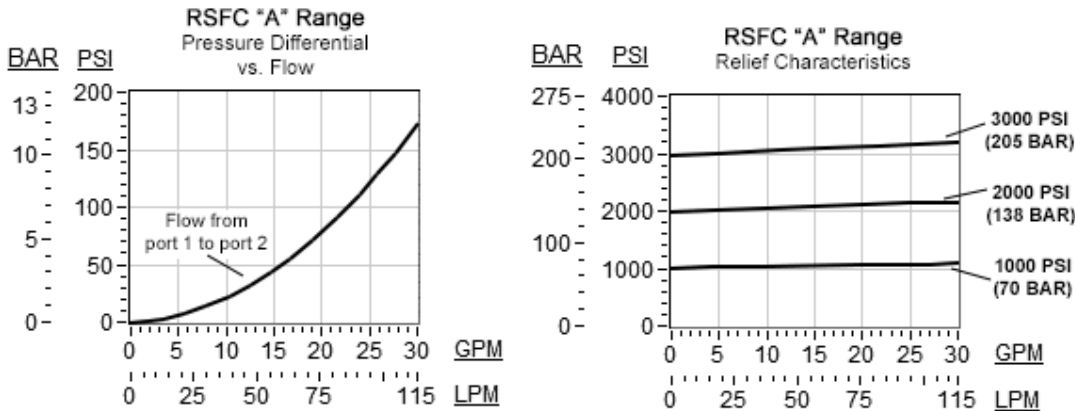

## RELATED MODELS

- [RSFC8](#) Pilot operated, balanced piston sequence main stage with integral T-8A control cavity

## RELATED ACCESSORIES

- [YSEA](#) Sequence with reverse flow check assembly