

Pilot-operated, balanced poppet sequence valves will supply a secondary circuit with flow once the pressure at the inlet (port 1) has exceeded the valve setting. The pressure setting of a sequence valve controls the pressure at port 1 relative to the pressure at the drain (port 3). These valves are insensitive to back pressure at port 2 (sequence), up to the valve setting. They may be used to regulate pressure in place of 2-port relief valves if there is pressure in the return line.

TECHNICAL DATA

Factory Pressure Settings Established at	4 gpm
Maximum Operating Pressure	5000 psi
Response Time - Typical	10 ms
Maximum Valve Leakage at Reseat	10 drops/min.
Adjustment - Number of Clockwise Turns to Increase Setting	5
Locknut Hex Size	9/16 in.
Locknut Torque	80 - 90 lbf in.
Seal kit - Cartridge	Buna: 990-402-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-402-006

CONFIGURATION OPTIONS



Model Code Example: RSFSLAN

CONTROL	(L)	ADJUSTMENT RANGE	(A)	SEAL MATERIAL	(N)	MATERIAL/COATING
L Standard Screw Adjustment	A	100 - 3000 psi (7 - 210 bar), 1000 psi (70 bar) Standard Setting	N	Buna-N		Standard Material/Coating
C Tamper Resistant - Factory Set	B	50 - 1500 psi (3,5 - 105 bar), 1000 psi (70 bar) Standard Setting	V	Viton		IAP Stainless Steel, Passivated
K Handknob	C	150 - 6000 psi (10,5 - 420 bar), 1000 psi (70 bar) Standard Setting				
	N	60 - 800 psi (4 - 55 bar), 200 psi (14 bar) Standard Setting				
	Q	60 - 400 psi (4 - 28 bar), 200 psi (14 bar) Standard Setting				
	W	150 - 4500 psi (10,5 - 315 bar), 1000 psi (70 bar) Standard Setting				

TECHNICAL FEATURES

- All 3 port sequence cartridges are physically and functionally interchangeable (i.e. same flow path, same cavity for a given frame size).
- Pilot flow continues to increase as the pressure at port 1 (inlet), relative to the pressure at port 3 (drain), rises above the valve setting.
- The main stage orifice is protected by a 150 micron stainless steel screen.
- Pressure at port 3 is directly additive to the valve setting at a 1:1 ratio and should not exceed 5000 psi (350 bar).
- Suitable for use in load holding applications.
- Because the modulating occurs inside the cartridge these valves are immune to most of the problems associated with cavitation, namely noise and manifold erosion.
- Will accept maximum pressure at port 2; suitable for use in cross port relief circuits.
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

PERFORMANCE CURVES

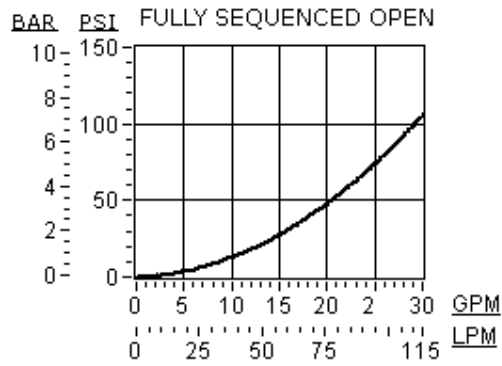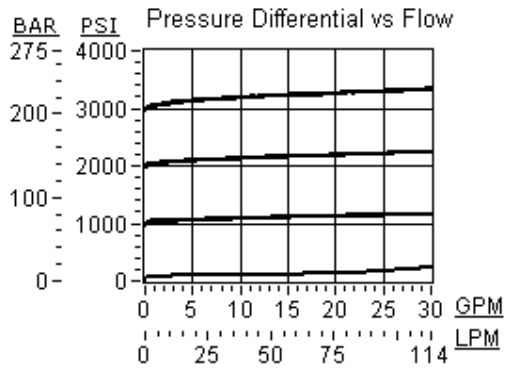

RELATED MODELS

- [RSFS8](#) Pilot operated, balanced poppet sequence main stage with integral T-8A control cavity