

All ports blocked cavity plug

Capacity:

Functional Group:


Model:

Products : Accessories : Cavity Plugs : 2 Port Cavities : All Ports Blocked


XCCA-XXN

Product Description

This cavity plug blocks all ports.



[Download](#)

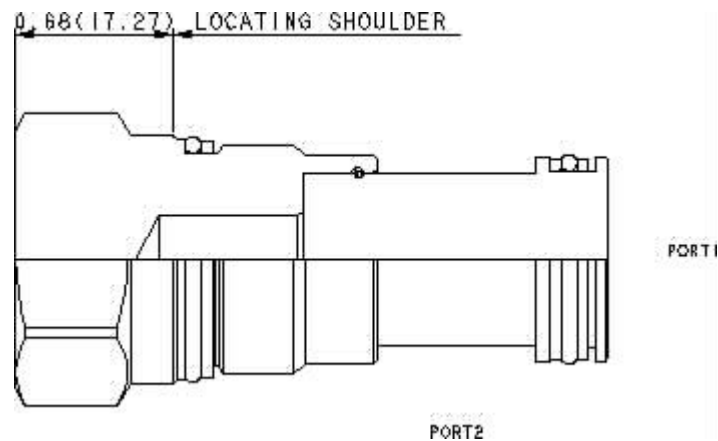

Technical Features

- Stainless steel cartridge options P or W are intended for use within corrosive environments with all external components manufactured in stainless steel or titanium. Internal working components remain the same as the standard valves.

Technical Data

	U.S. Units	Metric Units
Model Weight	0.49 lb.	0.22 kg.
Cavity	T-3A	
Maximum Operating Pressure	5000 psi	350 bar
Series (from Cavity)	Series 2	
Valve Hex Size	1 1/8 in.	28,6 mm
Valve Installation Torque	45 - 50 lbf ft	60 - 70 Nm
Seal Kits	Buna: 990-203-007	
Seal Kits	Viton: 990-203-006	

XCCA-XXN

Control

Adjustment Range

External Material/Seal
Material

X - +0.00

X - +0.00

N Buna-N +0.00

Copyright © 2007-2008 Sun Hydraulics Corporation. All rights reserved.
Terms and Conditions - ISO Certification - Statement of Privacy