

All ports blocked cavity plug

Capacity:

Functional Group:


Model:

Products : Accessories : Cavity Plugs : 2 Port Cavities : All Ports Blocked


XFCA-XXN

Product Description

This cavity plug blocks all ports.



[Download](#)

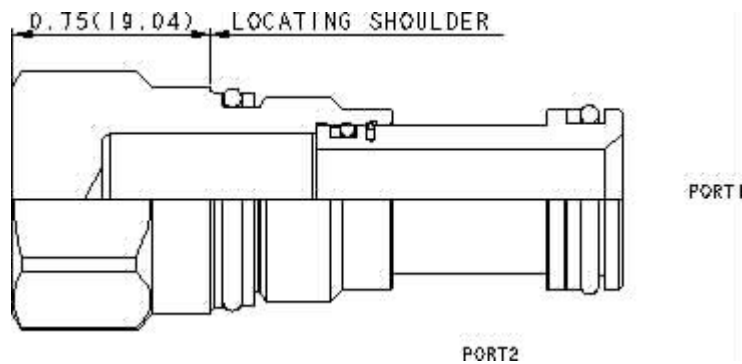

Technical Features

- Stainless steel cartridge options P or W are intended for use within corrosive environments with all external components manufactured in stainless steel or titanium. Internal working components remain the same as the standard valves.

Technical Data

	U.S. Units	Metric Units
Model Weight	0.20 lb.	0.09 kg.
Cavity	T-10A	
Maximum Operating Pressure	5000 psi	350 bar
Series (from Cavity)	Series 1	
Valve Hex Size	7/8 in.	22,2 mm
Valve Installation Torque	30 - 35 lbf ft	45 - 50 Nm
Seal Kits	Buna: 990-010-007	
Seal Kits	Viton: 990-010-006	

XFCA-XXN

Control

Adjustment Range

External Material/Seal
Material

X - +0.00

X - +0.00

N Buna-N +0.00

If the material/seal is P, the control must be X
If the material/seal is W, the control must be X

Related Models
XFCAE

Copyright © 2007-2008 Sun Hydraulics Corporation. All rights reserved.
Terms and Conditions - ISO Certification - Statement of Privacy