

T-10A cavity, T-13A cavity, or T-31A cavity, all ports open cavity plug


Capacity:

Functional Group:  
 Products : Accessories : Cavity Plugs : 2 Port Cavities : All Ports Open


Model:  
 XFOA-  
 XXN

Product Description

These cavity plugs can be used for both two-port (T-10A/T-13A, T-3A/T-5A, T-16A and T-18A) and four-port cavities (T-31A, T-32A, T-33A and T-34) and allow all ports to remain connected.



[Download](#)

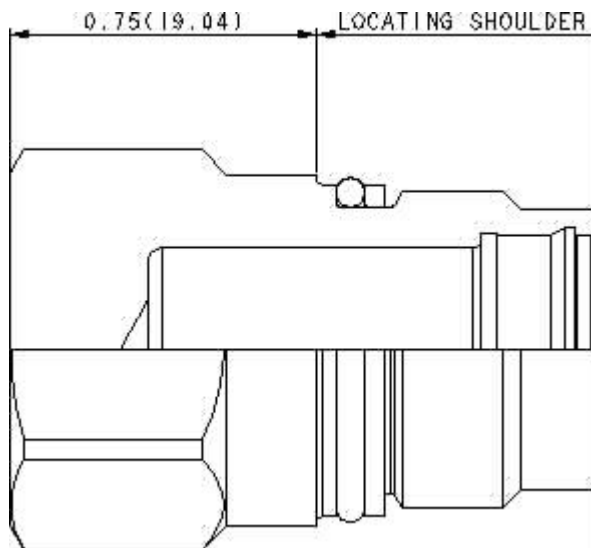

Technical Features

- Stainless steel cartridge options P or W are intended for use within corrosive environments with all external components manufactured in stainless steel or titanium. Internal working components remain the same as the standard valves.

Technical Data

	U.S. Units	Metric Units
Model Weight	0.15 lb.	0.07 kg.
Cavity	T-10A, T-13A & T-31A	
Maximum Operating Pressure	5000 psi	350 bar
Series (from Cavity)	Series 1	
Valve Hex Size	7/8 in.	22,2 mm
Valve Installation Torque	30 - 35 lbf ft	45 - 50 Nm
Seal Kits	Buna: 990-010-007	

---

---

## XFOA-XXN

Control

Adjustment Range

External Material/Seal  
Material

X - +0.00

X - +0.00

N Buna-N +0.00