

## All ports open cavity plug

Capacity:

Functional Group:


Model:

Products : Accessories : Cavity Plugs : 2 Port Cavities : All Ports Open


XI OA-XXN

### Product Description

These cavity plugs can be used for both two-port (T-10A/T-13A, T-3A/T-5A, T-16A and T-18A) and four-port cavities (T-31A, T-32A, T-33A and T-34) and allow all ports to remain connected.



[Download](#)

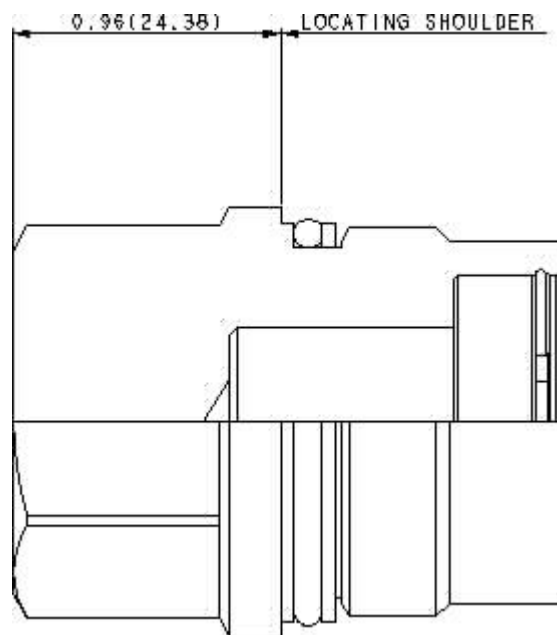

### Technical Features

- Stainless steel cartridge options P or W are intended for use within corrosive environments with all external components manufactured in stainless steel or titanium. Internal working components remain the same as the standard valves.

### Technical Data

	U.S. Units	Metric Units
Model Weight	0.63 lb.	0.29 kg.
Cavity	T-16A & T-33A	
Maximum Operating Pressure	5000 psi	350 bar
Series (from Cavity)	Series 3	
Valve Hex Size	1 1/4 in.	31,8 mm
Valve Installation Torque	150 - 160 lbf ft	200 - 215 Nm
Seal Kits	Buna: 990-016-007	

---

---

## XIOA-XXN

Control

Adjustment Range

External Material/Seal  
Material

X - +0.00

X - +0.00

N Buna-N +0.00