

All ports open cavity plug


Capacity:

Functional Group:
 Products : Accessories : Cavity Plugs : 2 Port Cavities : All Ports Open


Model:
 XIOA-XXV

Product Description

These cavity plugs can be used for both two-port (T-10A/T-13A, T-3A/T-5A, T-16A and T-18A) and four-port cavities (T-31A, T-32A, T-33A and T-34) and allow all ports to remain connected.



[Download](#)

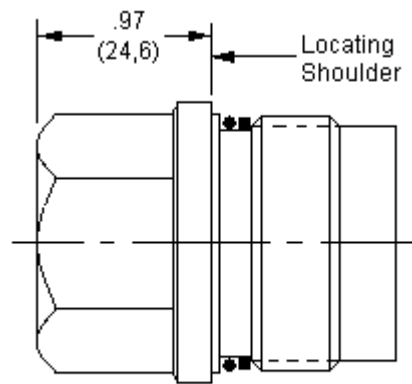

in (mm)

Technical Features

- Stainless steel cartridge options P or W are intended for use within corrosive environments with all external components manufactured in stainless steel or titanium. Internal working components remain the same as the standard valves.

Technical Data

	U.S. Units	Metric Units
Cavity	T-16A & T-33A	
Maximum Operating Pressure	5000 psi	350 bar
Series (from Cavity)	Series 3	
Valve Hex Size	1 1/4 in.	31,8 mm
Valve Installation Torque	150 - 160 lbf ft	200 - 215 Nm
Seal Kits - Cartridge	Buna: 990-016-007	

Seal Kits - Cartridge	Viton: 990-016-006	
Model Weight	0.63 lb.	0.29 kg.

XIOA-XXV

Control	Adjustment Range	External Material/Seal Material
X -	X - +0.00	V Viton +2.00

Special Notes

- No Special Notes Available for selected model.