

Port 1 to 2 open, port 3 blocked cavity plug

Capacity:

Functional Group:


Model:

Products : Accessories : Cavity Plugs : 3 Port Cavities : Ports 1 to 2 Open, Port 3 Blocked


XJOA-XXV

Product Description

This cavity plug allows ports 1 and 2 to remain open and blocks port 3.



[Download](#)

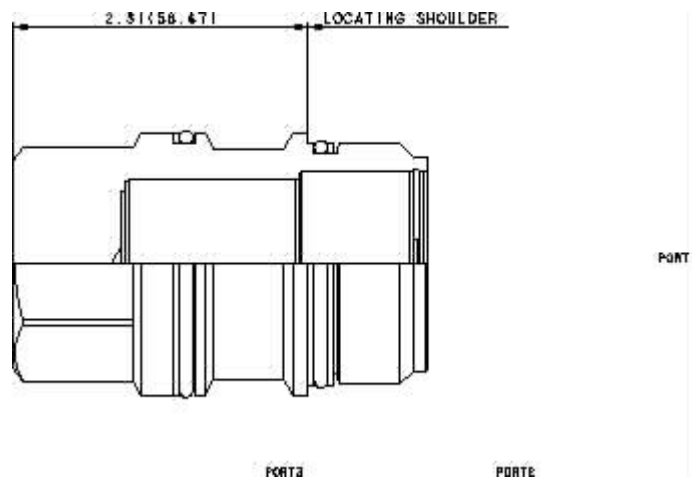

Technical Features

- Stainless steel cartridge options P or W are intended for use within corrosive environments with all external components manufactured in stainless steel or titanium. Internal working components remain the same as the standard valves.

Technical Data

| | U.S. Units | Metric Units |
|----------------------------|--------------------|--------------|
| Model Weight | 1.44 lb. | 0.65 kg. |
| Cavity | T-19A | |
| Maximum Operating Pressure | 5000 psi | 350 bar |
| Series (from Cavity) | Series 4 | |
| Valve Hex Size | 1 5/8 in. | 41,3 mm |
| Valve Installation Torque | 350 - 375 lbf ft | 465 - 500 Nm |
| Seal Kits | Buna: 990-019-007 | |
| Seal Kits | Viton: 990-019-006 | |

XJOA-XXV

Control

Adjustment Range

External Material/Seal
Material

X - +0.00

X - +0.00

V Viton +5.00

Copyright © 2007-2008 Sun Hydraulics Corporation. All rights reserved.
Terms and Conditions - ISO Certification - Statement of Privacy