


Functional Group:

Products: Manifolds: Line mount: Relief: 2 Port: Cross port


YFJ

YFJ

Aluminum Body Pressure Rating: 3000 psi (210 bar) Ductile Iron Body Pressure Rating: 5000 psi (350 bar)



Face: 6

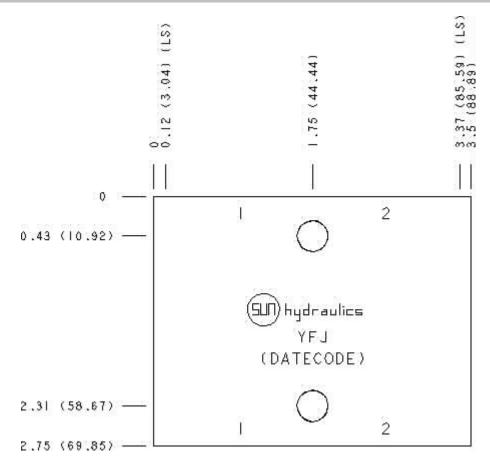

Cartridge extension measurement is to the centerline of the cartridge.

Port Headings and Sizes

YFJ All Ports SAE 8

Techr	nical	Data

Model Weight	1.05 lb.	0.48 kg.		
Cavity	T-10A	T-10A		
Body Features	Cross port	Cross port		
Body Type	Line mount			
Interface	None			
Open Cavity Quantity	2	2		
Mounting Hole Diameter	.34 in.	8.6 mm		
Mounting Hole Depth	Through	Through		
Mounting Hole Quantity	2	2		

Option Selection

U.S. Dollar ▼

Model Code Description
YFJ Aluminum, Buna-N, U.S. Units
YFJ/S Ductile Iron, Buna-N, U.S. Units

Special Notes

No Special Notes Available for selected model.

Copyright © 2007-2008 Sun Hydraulics Corporation. All rights reserved. Terms and Conditions - ISO Certification - Statement of Privacy