



Functional Group:  
 Products : Manifolds : Line mount : Counterbalance : 3 Port : Direct mount

Model:  
 ZNX

Aluminum Body Pressure Rating: 3000 psi (210 bar)  
 Ductile Iron Body Pressure Rating: 5000 psi (350 bar)



Face: 5

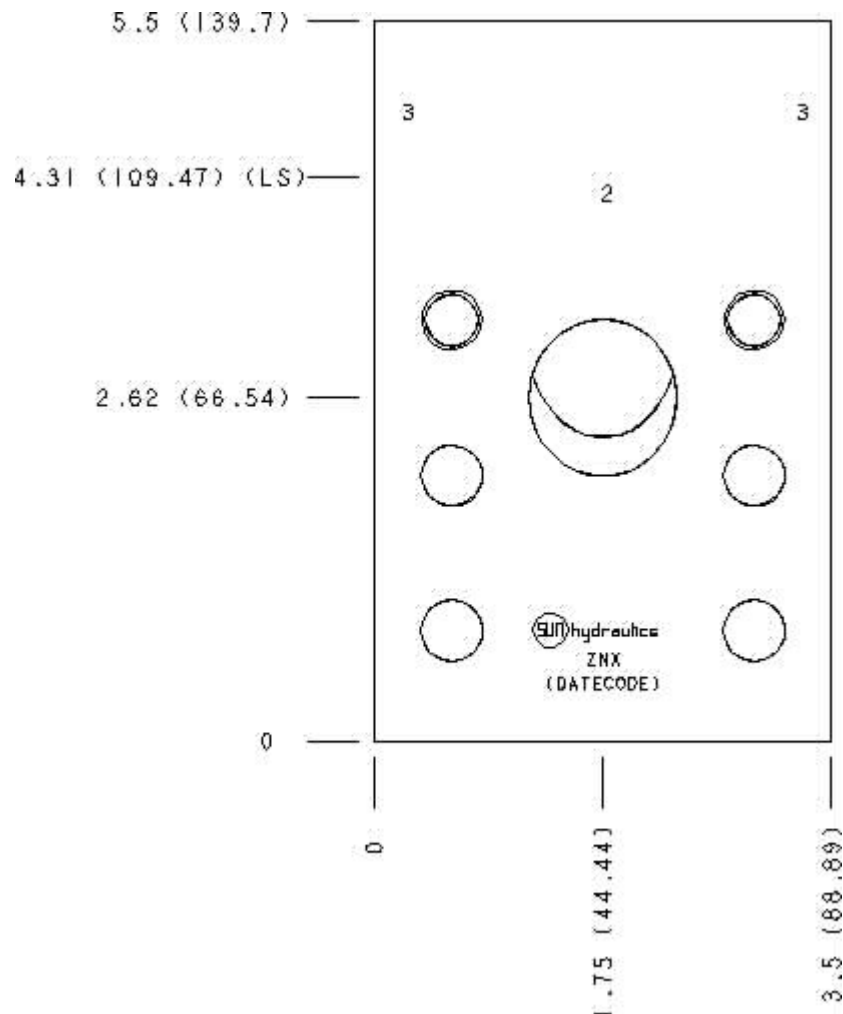

Cartridge extension measurement is to the centerline of the cartridge.

Port Headings and Sizes

ZNX/M	Ports 1 & 2	1 1/4" Code 61
ZNX/M	Port 3	1/4" BSPP

ZNX Ports 1 & 2 1 1/4" Code 61  
ZNX Port 3 SAE 6

Technical Data

	U.S. Units	Metric Units
Model Weight	4.79 lb.	2.17 kg.
Cavity	T-19A	
Body Features	Direct mount	
Body Type	Line mount	
Interface	1.25 SAE C61	
Open Cavity Quantity	1	

Option Selection

U.S. Dollar ▼

Model Code	Description
ZNX/M	Aluminum, Buna-N, Metric
ZNX/Z	Aluminum, Viton, Metric
ZNX	Aluminum, Buna-N, U.S. Units
ZNX/V	Aluminum, Viton, U.S. Units
ZNX/T	Ductile Iron, Buna-N, Metric
ZNX/W	Ductile Iron, Viton, Metric
ZNX/S	Ductile Iron, Buna-N, U.S. Units
ZNX/Y	Ductile Iron, Viton, U.S. Units

Display Components

	Description	Quantity
500-001-222	O-Ring	1

Special Notes

- No Special Notes Available for selected model.