
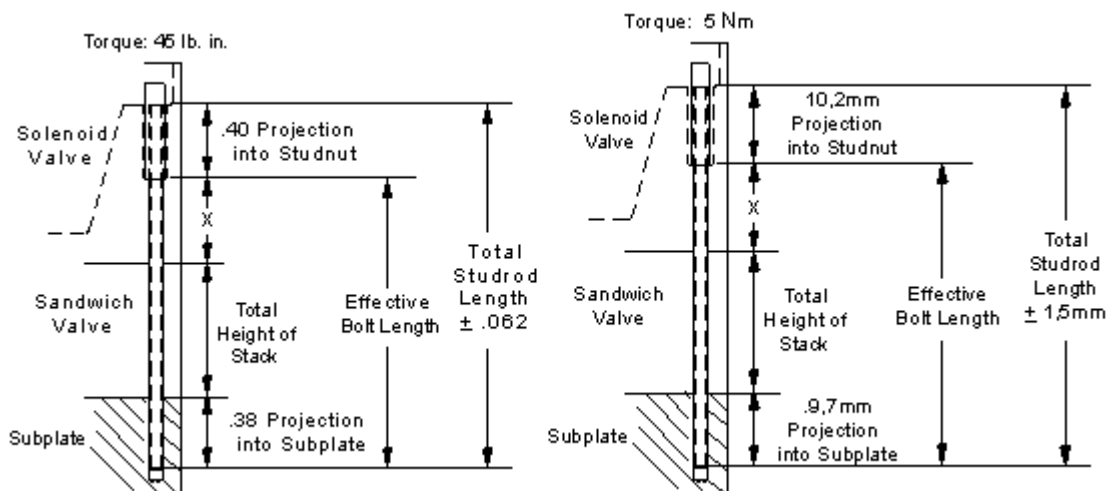


Product Description

To simplify the installation of ISO 03 and ISO 05 sandwiches, Sun offers uncut (can be cut to length in the field) or precut studkits in both inch and metric standard threaded rod. Once the rods are installed in a subplate or manifold, they act as a guide in assembling the sandwich body stack. After the directional control valve is assembled on top of the stack, Sun studnuts are used to retain the assembled stack.

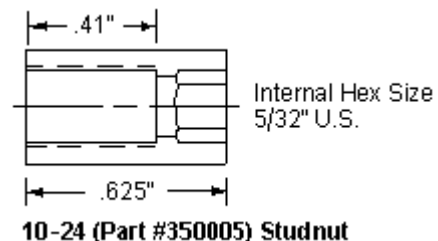

Technical Features

- Sun ISO 03 sandwich bodies are designed for multi-functional use to permit maximum circuit flexibility.
- Full Thread engagement.
- Studnuts feature an outside diameter equivalent to a standard socket head cap screw.
- Mechanical stop between the internal hex and the thread to prevent the hex wrench from being pushed out of its socket.

Technical Data

	U.S. Units	Metric Units
Model Weight	0.31 lb.	0.14 kg.
Hardness	26 - 32 Rc	
Internal Hex Size	5/32 in.	
Minimum Tensile Strength	125,000 psi	8620 bar
Minimum Yield Point	105,000 psi	7250 bar
Recommended Torque	45 lbf in.	5 Nm
Thread	10-24	
Title	Inch Standard	

Option Selection:

992-012

Copyright © 2007-2008 Sun Hydraulics Corporation.
All rights reserved.

[Terms and Conditions](#) - [Statement of Privacy](#)