

# HDK06 Components

## In-Stock Assemblies


Style	Part No.	Port Size	Bypass Rating	Indicator <sup>1</sup>	Includes Filter Cartridge
In-Tank	K060173	2½" NPT	25 psi / 172.5 kPa	Visual	P164697 Synteq®
In-Line	K060160				

## Replacement Filter Cartridges

Media Number	Media Technology	B <sub>x(c)</sub> = 1000 Rating	Part No.
No. ½	Synteq®	<3µm	P161016
No. 2	Synteq®	9µm	P165628
No. 2½	Synteq®	10µm	P176221
No. 4	Synteq®	20µm	P164697
No. 9	Synteq®	23µm	P164699
No. 16	Synteq®	22µm	P161571
No. 20	Synteq®	>50µm	P166597
Media Number	Media Technology		Part No.
No. 149	Wiremesh	150µm nominal	P160700

### Element Notes

- Standard HDK06 replacement filters have BunaN seals, which are appropriate for most applications involving petroleum oil. Filters with seals made of fluorocarbon elastomer (such as **Viton**® from DuPont Dow Elastomers and **Fuorel** from 3M Company) are required when using diester, phosphate ester fluids, water glycol, water/oil emulsions, and HWCF (high water content fluids) over 150°F.
- Donaldson Synteq® synthetic filter media is compatible with petroleum based fluids, most phosphate esters, water oil emulsions, and HWCF (high water content fluids).

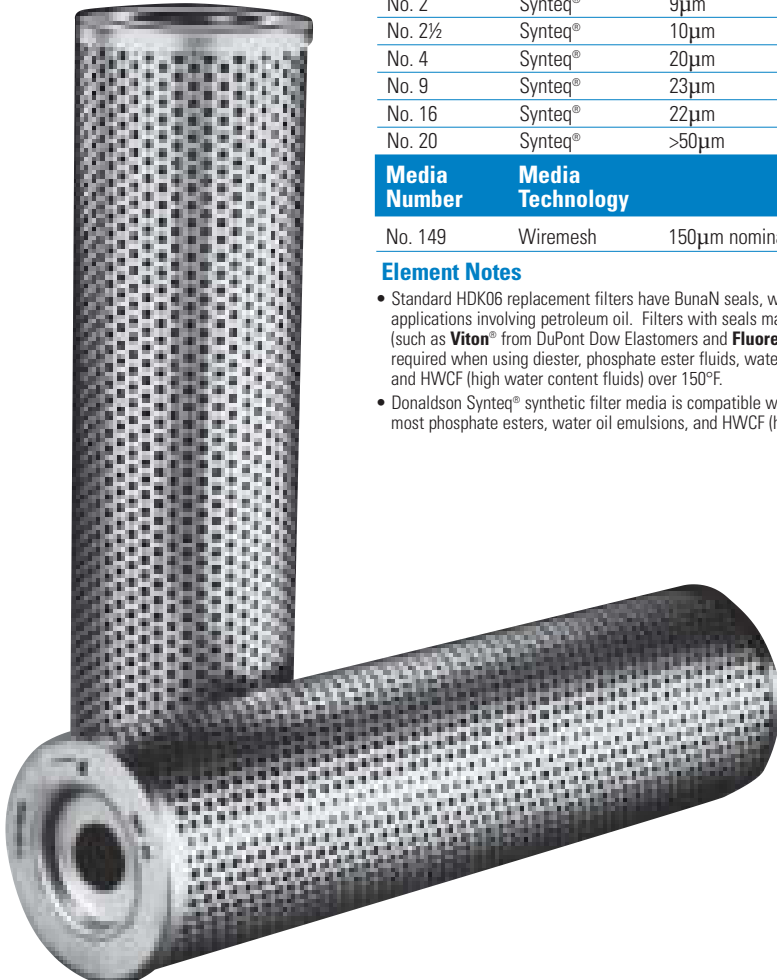

All HDK06 filter cartridges are 16"/406mm in length.